


Cleaning and oiling a rotary hook system.

It is very important that **YOU** as the customer knows how to correctly oil your hook system. It is important for you oil the hook on a **regular** bases.

Remove the needle and the bobbin case. Unplug your sewing machine!


Remove your stitchplate and clean between the feed dog rows like it shows you in the picture below. Please refer to your manual if you do not remember how to take off the stitch plate.

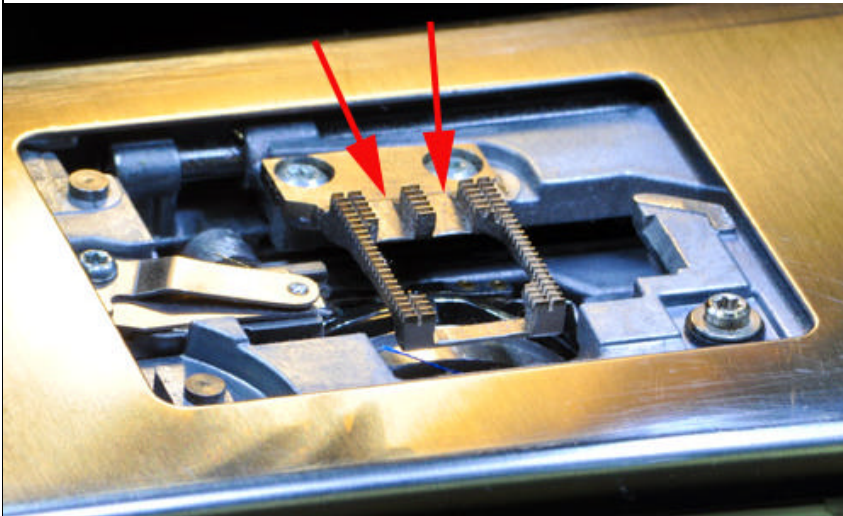

The picture below shows you how the hook looks like when your needle is in the highest position. If you see a lot of "dirt" around there, clean it out with a brush before you go to the next step.



Now turn your handwheel in sewing direction until you see the picture below. As you will turn you will see an opening between the two points. (the two red arrows pointing at it). In some machines both points are maybe metal or like you see here, one is maybe "plastic". When the ring behind (the green arrow is pointing at the spot) is showing, stop turning the handwheel. ***That is where you put a drop of oil.*** The ring may have a small cut out like in this picture, or it might be solid.

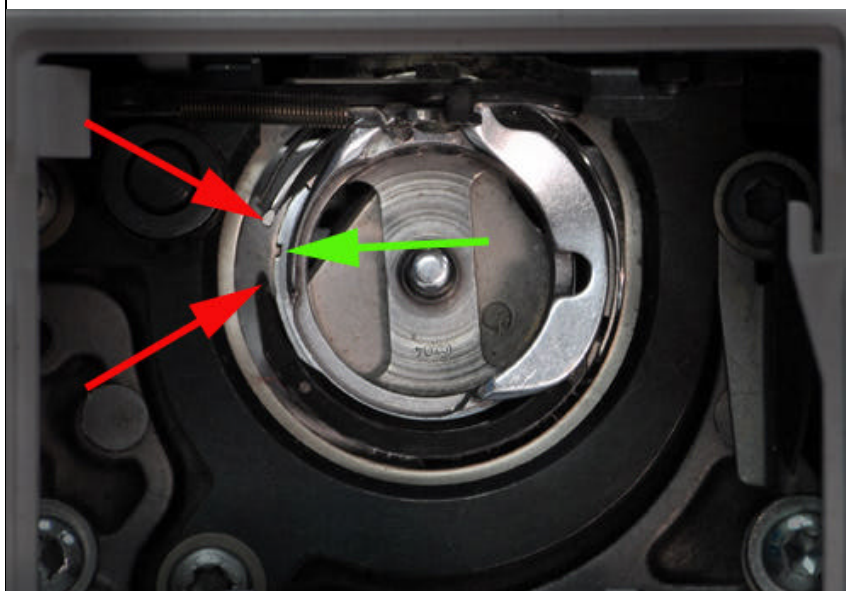

[Home](#)

As always [Email](#) me if you need more help or have any questions.

Copyright BFSC 2009 | [contact webmaster](#)